




DIMENSION



CEILING THICKNESS

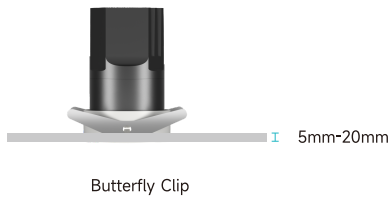

SUGGESTED SPACING AND WALL DISTANCE

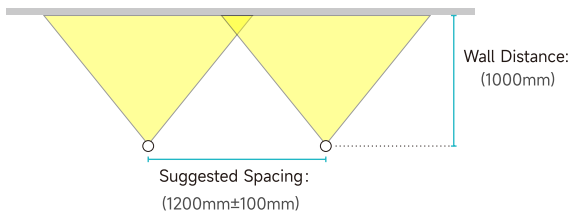

DESCRIPTION

DELLA Downlight Series: a fusion of sleek design and advanced technology. Categorized into 3 version of Designer, Premium, and Standard. With sizes from 1.25" to 4", its versatility is matched by optical ranges from a sharp 8° to a wide 50°, supplemented by wall-washing and zoom functions. DELLA offers a selection of bezels, including trim or trimless, squares, and minimalist small openings, it can be fixed or adjustable with clear measurement.

With its modular structure for flexibility, superior light quality and lower UGR for visual comfort, DELLA exemplifies modern downlight excellence.

FEATURES

- Superbly engineered Optics for unparalleled uniform illumination of surfaces.
- Smooth and even light distribution without dark area.
- Distribute most light uniformly on wall instead of spreading too much on floor.
- Excellent low glare for visual comfort.


SPECIFICATION

INPUT VOLTAGE 220-240V / 100-277V AC, 50-60Hz
DIMMABLE On-off / 0/1-10V / DALI / TRIAC / CASAMBI
 BEAM OPTIC Wall Washing
 HOUSING COLOR Black
 OPERATING TEMPERATURE RANGE -20--+40°C


MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm)	BEAM OPTIC
DM075-DF71RF02	10W	3000K	492lm (CRI 90+)	Wall Washing
DM075-DF71RF02	12W	3000K	560lm (CRI 90+)	Wall Washing
DM075-DF71RF02	15W	3000K	677lm (CRI 95+)	Wall Washing

LIGHT DISTRIBUTION

WALL WASHER 10W

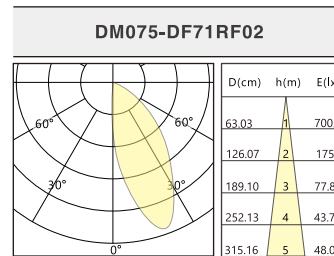

WALL WASHER 12W

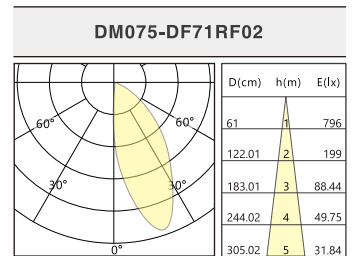

WALL WASHER 15W

